



Self-lock grate

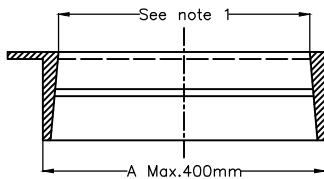


Adjustable frame

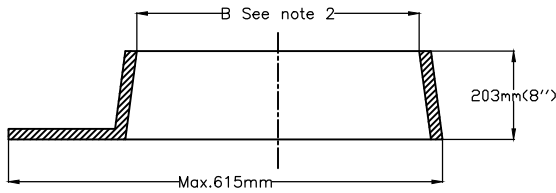


Tapered guide frame


Sectional view of width

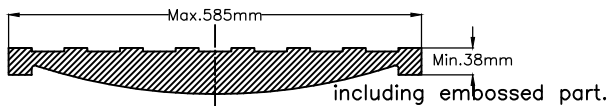

Self-lock grate

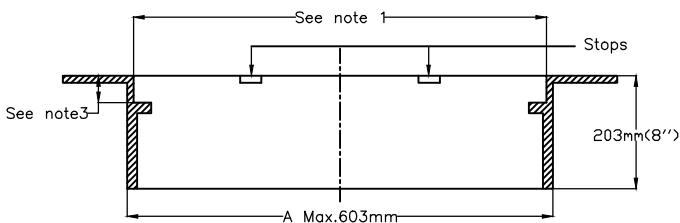


Adjustable frame

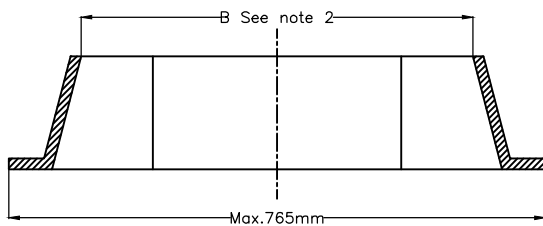



Tapered guide frame

Sectional view of length

NOTE—Part design is presented for general guidance purposes only.

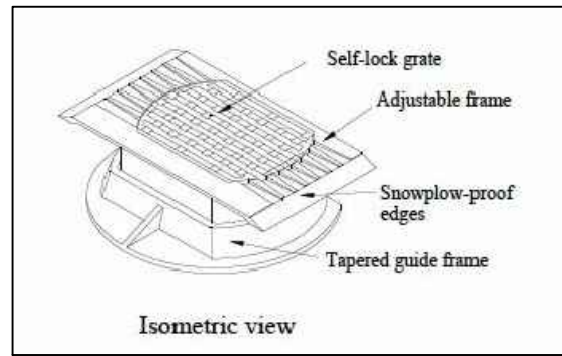

Isometric view

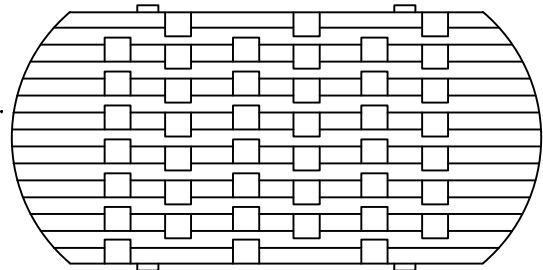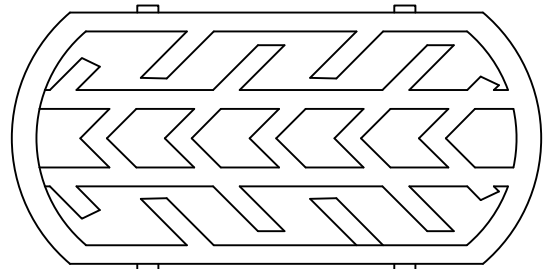

Top view of Self-lock grates

NORMATIVE NOTES—

1. Dimensions of frame shall be at most 10mm greater than dimension of grate.
2. Dimension B of tapered guide frame shall be at least 15mm and at most 30mm greater than dimension A of frame.
3. Distance between upper side of seat and upper side of adjustable frame with snowplow-proof edges shall be at least equal to thickness of grate, with a tolerance of +3/-0mm.

REV.NO.	REVISIONS	DATE

SPEC	TITLE		ALL DIMENTION ARE IN MM UNLESS SPECIFIED	
MATERIAL	SELF-LOCKING GRATE & FRAME.		WT.IN	PROJECTION
COATING			SCALE - NTS	SHT: 1 of 1
APP BY			REF. NO. :- 6018,6019,6020	
CHEKD BY			NSI (INDIA) LIMITED BELTALA, CHAMRAIL, HOWRAH-711114 TEL. : +91(3212)246912/+91-33-26662581 FAX : +91(3212)246909/+91-33-26662582 E-mail : rp@nsilimited.com	
DRAWN BY	S.S.	21.04.17		
	NAME	DATE		